




Item 3-8

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04S 3/00 // H04R 5/04		A1	(11) International Publication Number: WO 98/06239
			(43) International Publication Date: 12 February 1998 (12.02.98)
(21) International Application Number: PCT/FI97/00466 (22) International Filing Date: 5 August 1997 (05.08.97) (30) Priority Data: 963104                  6 August 1996 (06.08.96)          FI 972221                  26 May 1997 (26.05.97)          FI (71) Applicant (for all designated States except US): SAMPLE RATE SYSTEMS OY [FI/FI]; Finlaysoninkuja 19, FIN-33210 Tampere (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): KUUSAMA, Juha [FI/FI]; Nivarinkatu 8 I 24, FIN-33610 Tampere (FI). JUHOLA, Minna [FI/FI]; Arkkitehdinkatu 15 D 13, FIN-33720 Tampere (FI). LAAKSONEN, Juha [FI/FI]; Opiskelijankatu 60 D 278, FIN-33720 Tampere (FI). (74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report.

(54) Title: SETUP IN HOME THEATRE OR OTHER SOUND REPRODUCTION EQUIPMENT

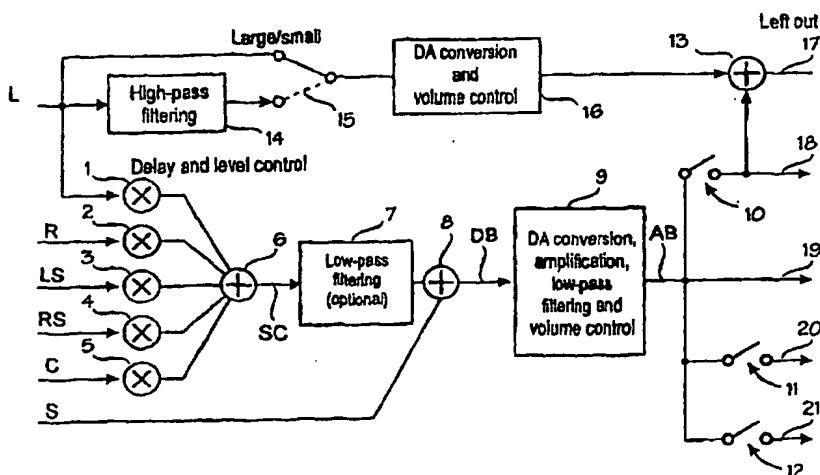

## (57) Abstract

Setup to be used in a home theatre or other sound reproduction system for handling the low frequency sound signals with a signal source providing several full bandwidth digital sound channels (L, R, LS, RS, C) and possibly one or several digital low frequency subwoofer channels (S). The setup consists of delay and level control unit (1...5) at least for each full bandwidth signal channel, which is equipped with a speaker not capable of reproducing low frequency sounds, a first summing stage (6) for creating the sum channel (SC) by summing the delay and level controlled signal channels, a second summing stage (8) for adding the subwoofer signal to the lowpass-filtered sum channel in order to create a digital bass channel and (DB), a DA-conversion-, amplification-, lowpass-filtering- and volume control unit (9) for performing these functions to the digital bass channel in order to create an analog bass channel AB. Alternatively lowpass-filtering may be done with a digital filter (7) in which case the analog lowpass-filtering may be omitted.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

### Setup in home theatre or other sound reproduction equipment

5           The innovation is a setup in home theatre or other sound reproduction equipment to be used for handling low frequency audio signals with an audio signal source producing several digital full bandwidth audio channels and possibly in addition to these one or several digital low frequency subwoofer channels.

10           As laserdisc players and hifi-VCR's have grown popular, also the so called home theatre setups have become widespread, especially in USA. Such a setup typically includes a large screen television, laserdisc player and/or VCR and a sound reproduction system consisting of surround sound decoder, multi-channel audio amplifier and speakers. In addition to the usual  
15 two main front speakers there is a centre speaker between them, one or two surround speakers situated behind or on sides of the listeners and possibly also a separate subwoofer speaker for reproduction of low bass signals.

A simplified block diagram of a home theatre setup is presented in figure 1. For the sake of clarity, user and control interfaces, volume control  
20 (placed either in digital domain in conjunction with DA-converters or after the bass management) and power amplifiers have been left out of the figure. The setup in figure 1 consists of input stage 100, into which both several analog inputs 101, 102, 103 and several digital inputs 104, 105, 106 may be connected. In each case the input signal is selected with signal source selectors  
25 107 and 108, respectively for analog and digital input sources. After this the analog input signal is AD-converted with AD-converter 109 and digital input signal is handled with digital audio receiver 110. From these two digital signals one is selected with source selector 111, followed by the processor unit 112 which will perform the desired processing to the digital audio signal. This  
30 processing may include such steps as Dolby Digital (previously Dolby AC-3) decoding, Dolby Pro Logic decoding, THX post processing, room simulations, tone controls etc. After these processing steps these typically six digital audio signals are DA-converted. The number of channels varies between different systems; for instance there may be from 1 up to 4 or 6 surround channels and  
35 also there may be more than one center channels. After the DA-conversion

there has to be the so called bass management in block 114, to avoid feeding strong bass signals to speakers unable to handle them. As a result, output signals for left front speaker, center speaker, right front speaker, left surround speaker, right surround speaker and subwoofer are generated. These outputs  
5 are labelled 115 –120 in figure 1.

Let us note, that in this context the word speaker refers to a typically enclosed entity consisting of one or several speaker elements. "Large speaker" refers to a speaker capable of reproducing at least most of the audio bandwidth, ie. both low bass signals and high treble sounds. "Small speaker"  
10 refers to a speaker which is only able to reproduce high frequencies and no low bass signals.

There is also low bass material in movie soundtracks. In many cases it is not practical to have six large speakers in a home theatre setup. An example of a more practical solution is to have large front main speakers  
15 whereas the other speakers are small. Small speakers can not reproduce low frequency signals; high level low frequency signals may even damage these speakers. One of the functions of a home theatre device is therefore to extract low bass signals from the small speaker output signals and to redirect them to large speakers capable of reproducing them. This function is called bass  
20 management (block 114 in figure 1).

In most home theatre devices bass management is realized with analog filters and switches. This approach is very straight forward to build and is directly compatible with eg. the Dolby configuration definitions. Disadvantages of this approach are the limited flexibility resulting from fixed switches  
25 and unclarity from the user's point of view. Therefore most home theatre devices can only perform configurations 1 and 2 of the Dolby license definitions, some of them configuration 3 as well. The user can not choose freely from all possible combinations of large and small speakers and also the user has to know and understand the meaning of Dolby configurations 1, 2 and 3 (Dolby  
30 AC-3 licensee information manual, version 1.0, figures 9.6, 9.7 and 9.8; all blocks are analog).

The limitations of analog bass management are easy to overcome by carrying out the necessary filtering and summing in digital domain. In this case the user interface for defining the speaker configuration is intuitively:  
35 "Front Main: large/small, Center: large/small/none, Surrounds:

large/small/none, Subwoofer: yes/no". Now at its best the bass management for one channel may be performed as described in figure 2. This entity described in figure 2 is unlikely to have been presented before and is placed for each channel in the processing unit 112 in figure 1. The result is that the processing unit is only followed by a six-channel DA-converter 113 while bass management unit 114 is left out as obsolete.

In figure 2 the incoming digital signals for left front speaker, center speaker, right front speaker, left surround speaker, right surround speaker and subwoofer speaker have been marked 201-206. These signals are fed to complementary filters 207-211, which divide the incoming signals to "high" and "low" output signals, some of which equals the incoming signal except for slight processing delay. These ten output signals as well as the subwoofer output signal are driven through adjustable amplifying stages 212-222 to summing stage 223 to generate output signal 224 for one speaker. With summing stages 212-222 the output signal for each speaker may be flexibly set as combination of full bandwidth input signals.

Controlled by speaker configuration switches a large signal gets both "high" and "low" outputs. A small speaker only gets "high" output signals, which lack the low bass sounds. These will be directed to large speakers. Also leaving a speaker completely off the design is possible. In this case the signal of eg. missing center speaker may be divided between the two main front speakers. Also when bass sounds are divided to several speakers for reproduction (eg. configuration with several large speakers but no subwoofer) the correct level for bass sounds can be set.

The benefits of this approach also include perfect control of processing delays and thus the signal delays experienced by the listener, and the fact that the sound field may be controlled by peculiar ways eg. by shifting it 90 or 180 degrees.

In practice some summing coefficients are always zero eg. right channel signals are never redirected to left channel, and subwoofer never gets any high sounds. To save processing power the system described in figure 2 needs not to be implemented completely. It may also be carried out with appropriate combinations of ordinary non-complementary filters in which the signal is suitably fed, even if the processing block diagram would be substantially different from the one described above.

Even though digital bass management has many benefits it also has its drawbacks especially when using Dolby AC-3 system (also known as Dolby Digital). This system includes a separate subwoofer channel which by definition is to be reproduced ten desibels ( $10\text{dB} = 3.16$ ) louder than the other channels. Since the dynamic range of DA-converters is limited the sound quality may then deteriorate. Let us assume for example a speaker configuration with large main front speakers, small other speakers and no subwoofer speaker in a situation in which the incoming signal has full amplitude bass sound in every channel. If reference level for full amplitude signal is said to be 1 then the summed bass signal level of surround speakers is 2, center channel bass signal level is 1 and subwoofer channel signal level is 3.16, and the summed redirected bass signal level is thus  $3.16 + 2 + 1 = 6.16$ . When this is divided equally to left and right main front speakers the signal level of these channels becomes  $1 + (6.16/2) = 4.08 = +12.2\text{ dB}$ . In order to avoid overdriving the DA-converters under any circumstances the signal level has to be reduced 12.2 desibels before DA-converters. The worst case is a speaker configuration with no subwoofer and in which only the center channel is large resulting in a need to reduce the signal level by 18.2 dB. This leads to deterioration of sound quality.

The 18 or 20 bit DA-converters currently widely in use have dynamic range of about 85-95 dB. When signal level is dropped before DA-converters their limited dynamic range is not fully exploited (12-18 dB equals 2-3 bits).

It is also inconvenient for the user if the output signal level varies substantially between different speaker configurations. For instance determining correct amplifying power and sensitivity is almost impossible.

The purpose of the present invention is to present a bass management setup which combines the benefits of both setups described earlier. This is achieved by a setup according to the present invention the first embodiment of which is characterized by comprising

a delay and level control unit for at least every full bandwidth signal channel equipped with a speaker unable to reproduce low pitch sounds;

a first summing stage for summing the delay and level controlled signal channels to create a sum channel;

a second summing stage for summing the low frequency subwoofer channel into the sum channel to create a digital bass channel and

a DA-converter-, amplifying- low-pass filtering- and volume control unit to perform these functions to the digital bass channel in order to create an analog bass channel.

The second embodiment of the invention is characterized by comprising

a delay and level control unit for at least every full bandwidth signal channel equipped with a speaker unable to reproduce low pitch sounds;

10 a first summing stage for summing the delay and level controlled signal channels to create a sum channel

a low pass filter for the sum channel

a second summing stage to sum the low frequency subwoofer channel to the low frequency filtered sum channel to create a digital bass channel and

15 a DA-converter-, amplifying- and volume control unit to perform these functions to the digital bass channel in order to create an analog bass channel.

Best features of the previously described bass management methods may be combined with a setup in which all necessary filters and delays are done digitally but signal summing at least mostly in analog domain. By doing this the flexibility of a digital system is maintained and the dynamic range of DA-converters can be fully exploited.

Economically the setup complying with this innovation also includes either switching and summing stages or adjustable volume control and summing stages to combine the analog bass channel to the analog signals going to speakers which are able to reproduce full bandwidth sound signals.

In the following this innovation is presented in more detail with reference to the accompanying drawing in which

30 Figure 1 shows a simplified block diagram of a traditional home theatre setup,

Figure 2 shows the block diagram of digital bass management in principal, and

Figure 3 shows the setup according to the invention for bass management in home theatre setup as a block diagram.

5           Figure 3 describes the setup according to the invention for bass management in home theatre setup as a block diagram. Also the interfacing of the bass channel to one other channel is presented, in this case the left front channel. The signal redirection has been left out from this figure to maintain clarity.

10           Inputs for this setup are the digital sound signals divided in the following six channels: left front channel L, right front channel R, left surround channel LS, right surround channel RS, center channel C and subwoofer channel S. These signal inputs may be generated for example in block 112 in figure 1 and they comply with the signals in use for example in Dolby Digital  
15 (Dolby AC-3) system. In figure 3 the left front channel L has been presented completely. It consists of a high-pass filter 14 through which the signal goes if the front speakers are small, before the signal is fed to switch 15. Equal building blocks (not presented) also exist for right and center channels as well as both surround channels. If any specific speaker is small, the low bass frequencies are taken away from its signal by high-pass filtering. If however a  
20 speaker is large the signal is neither high-pass filtered nor summed to the bass channel to be described in more detail later, but instead the high-pass-filter 14 is bypassed and the signal fed directly to switch 15 directing the signal to summing stage 13 through DA-converter and volume control unit 16. In  
25 summing stage 13 the bass channel is summed to this signal in order to create the signal directed to this specific large speaker.

          In order to create the bass management in a setup according to the invention a bass channel is created from the signals of those channels in which the speakers are small and the subwoofer channel S. In the setup presented in figure 1 any of the channels L, R, LS, RS and C can be withdrawn to  
30 the bass channel. In this setup the level balance between the signals and delays is first adjusted in a delay-and level control unit 1...5 respectively. After this the signals are summed in a summing stage 6 to create the sum channel SC. Also in this setup the signals from large speakers are not added in the  
35 sum channel by setting their amplification to zero in the delay-and level control



unit. Subwoofer channel S signal is then added to the summed and possibly low pass-filtered (7) signal creating the digital bass channel signal DB. This signal is processed in DA-converter-, amplification-, low pass-filtering- and volume control unit 9 to create analog bass channel AB. This signal is directed  
5 primarily to subwoofer channel 19 if there is a subwoofer in the system. If there is no subwoofer the signal is directed to large speakers. One low pass-filter is enough for the bass channel signal and it can be done either digitally in unit 7 or in analog domain in unit 9, ie. either before DA-conversion or after it.

When analog bass channel is directed to large speakers in stead of  
10 the missing subwoofer speakers, switches 10, 11 and 12 of figure 3 are used to direct the bass channel for summing in left and right front channel 17 and 18, surround channel 20 or center channel 21 depending on which speakers of these are large. Summing is done in summing stages of which only the left front channel summing stage 13 is presented. It is possible for left and right  
15 front channel as well as left and right surround channel speakers to be different from each other, ie. one small and one large, but this deteriorates the sound quality. In this case, however, the number of switches 10 and 11 has to be doubled, one for each front speaker and one for each surround speaker, respectively.

20 Let us note that the analog switches 10, 11 and 12 can be replaced by a volume control. In this case no attenuation/level control is needed in digital summing stage since the bass channel level control is done in this volume control. Also, in this case the dynamic range of the bass channel DA-converter is always fully exploited.

25 The benefits of the setup complying with this innovation are:

- Only a minor amount of processing power is required, maximum 5 high pass-filters and 1 low pass-filter. And the lowpass-filter can be performed in analog domain if required.
- There is allways full amplitude signal in DA-converters except in the bass  
30 channel taking advantage of all available dynamic range. Even if the bass signal of some individual channels in some cases has to be attenuated the sound quality is not deteriorated because the noise spectrum of the noise generated in a DA-converter is spread to the whole audio band. Since in any case only the low frequencies are required from the signal in the bass

channel DA-converter most of the signal spectrum and therefore also most of the noise may be lowpass-filtered after DA-conversion.

- The flexibility of digital setup is maintained.

The method for handling different channel signals in a setup complying with this invention may be summarized in the following bass management philosophy.

1: If a speaker is large nothing is done to the signal.

2: If a speaker is small the signal is high-pass-filtered and simultaneously summed to the subwoofer signal with amplitude depending on speaker configuration to create a bass channel. Bass channel is lowpass-filtered. If there is a subwoofer speaker in the system the bass channel is directed to it. If there is no subwoofer speaker the bass channel is summed to the signals directed to large speakers.

The setup complying with this innovation is above described with only one explanatory example and it is therefore understandable that it may be altered in various ways based on the bass management philosophy without, however, differing from the scope of the protection defined in the attached patent claims.

20

25

30

**Patent claims**

1. Setup to be used in a home theatre or other sound reproduction system for handling the low frequency sound signals with a signal source providing several full bandwidth digital sound channels (L, R, LS, RS, C) and  
5 possibly one or several digital low frequency subwoofer channels (S), characterized in that the setup comprises:

a delay-and level control unit (1...5) at least for each full bandwidth signal channel, which is equipped with a speaker not capable of reproducing low frequency sounds,

10 a first summing stage (6) for creating the sum channel (SC) by summing the delay-and level controlled signal channels,

a second summing stage (8) to add the low frequency subwoofer channel (S) to the sum channel in order to create a digital bass channel (DB), and

15 a DA-conversion-, amplifying-, lowpass-filtering-and volume control unit (9) to perform these functions to the digital bass channel in order to create a analog bass channel (AB).

2. Setup to be used in a home theatre or other sound reproduction system for handling the low frequency sound signals with a signal source providing several full bandwidth digital sound channels (L, R, LS, RS, C) and  
20 possibly one or several digital low frequency subwoofer channels (S), characterized in that it comprises

a delay-and level control unit (1...5) at least for each full bandwidth signal channel, which is equipped with a speaker not capable of reproducing  
25 low frequency sounds,

a first summing stage (6) for creating the sum channel (SC) by summing the delay-and level controlled signal channels,

a lowpass-filter (7) for the sum channel,

a second summing stage (8) for adding the subwoofer signal to the  
30 lowpass-filtered sum channel in order to create a digital bass channel and

a DA-conversion-, amplifying- and volume control unit for performing these functions to the digital bass channel in order to create a analog bass channel.

3. A setup according to claim 1 or 2, c h a r a c t e r i z e d that it further comprises switch means (10, 11, 12) and summing means (13) for combining the analog bass channel (AB) to the analog signals directed to speakers capable of reproducing full bandwidth sound signals.

- 5           4. A setup according to claim 1 or 2, c h a r a c t e r i z e d in that it further comprises adjustable volume control means and summing means (13) for combining the analog bass channel (AB) to the analog signals directed to speakers capable of reproducing full bandwidth sound signals.

Fig. 1

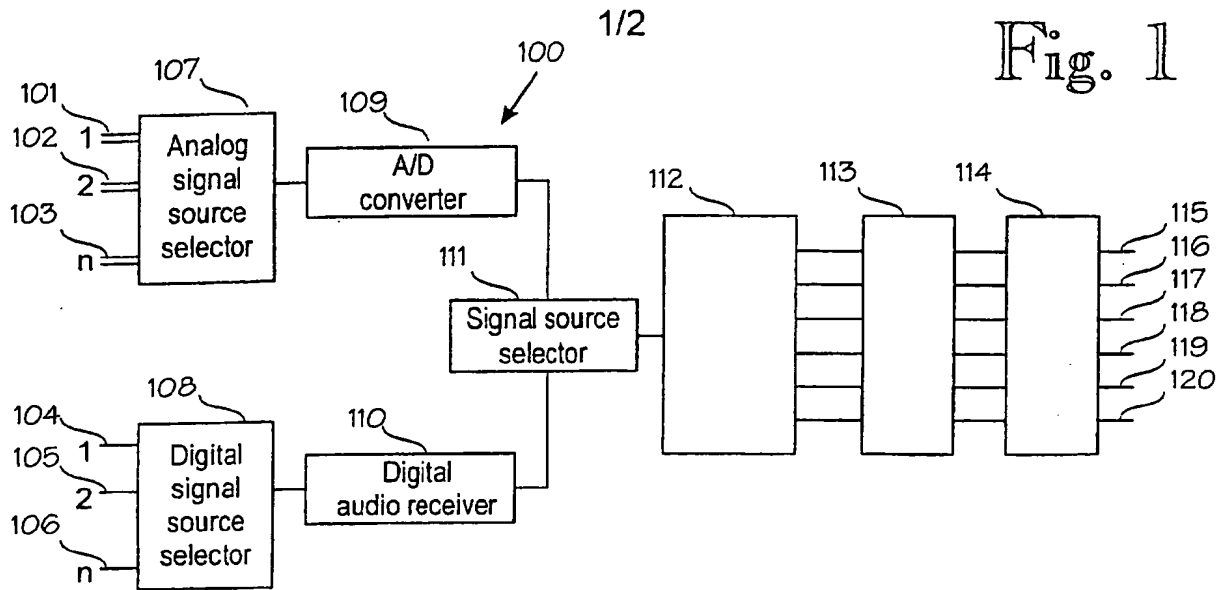


Fig. 2


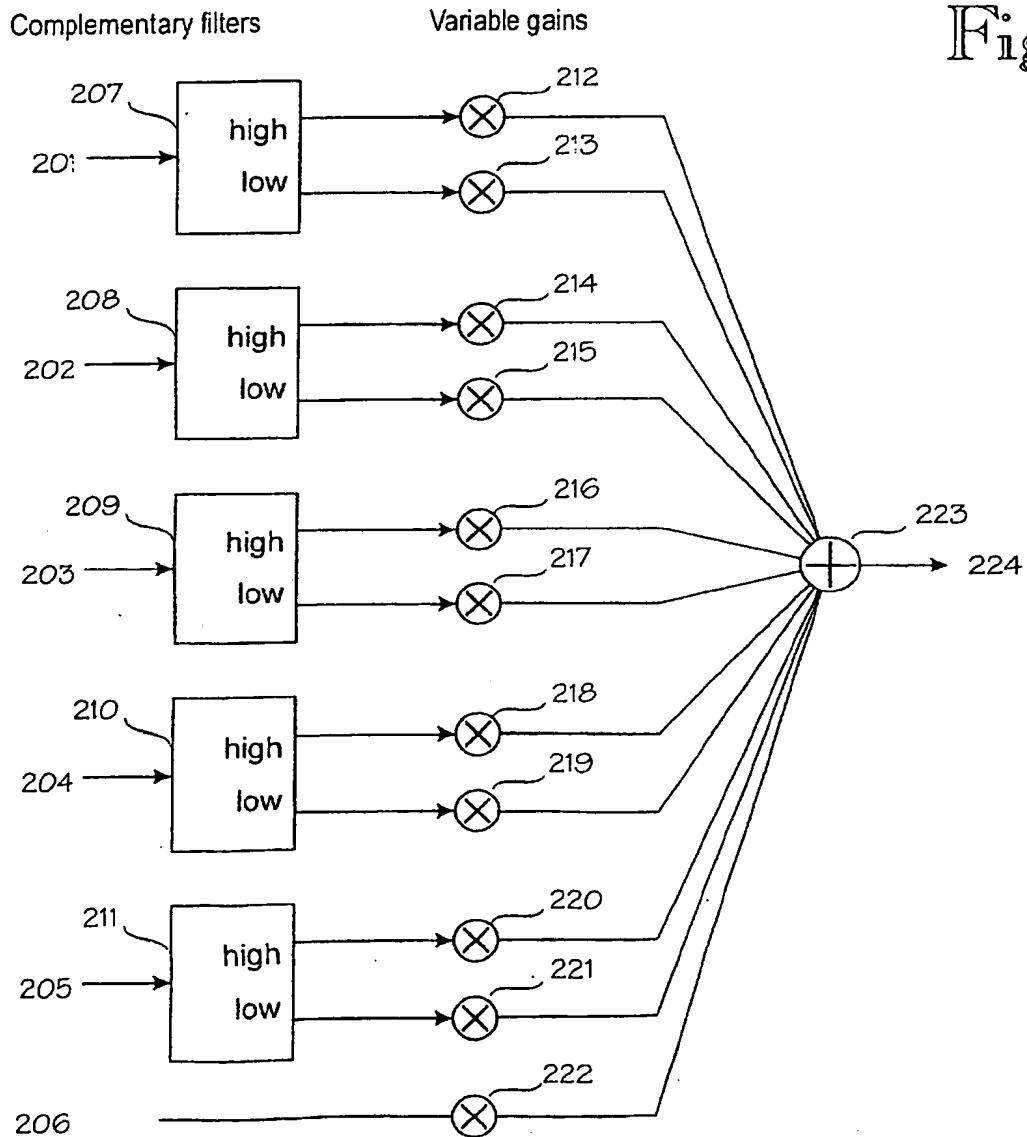


Fig. 3

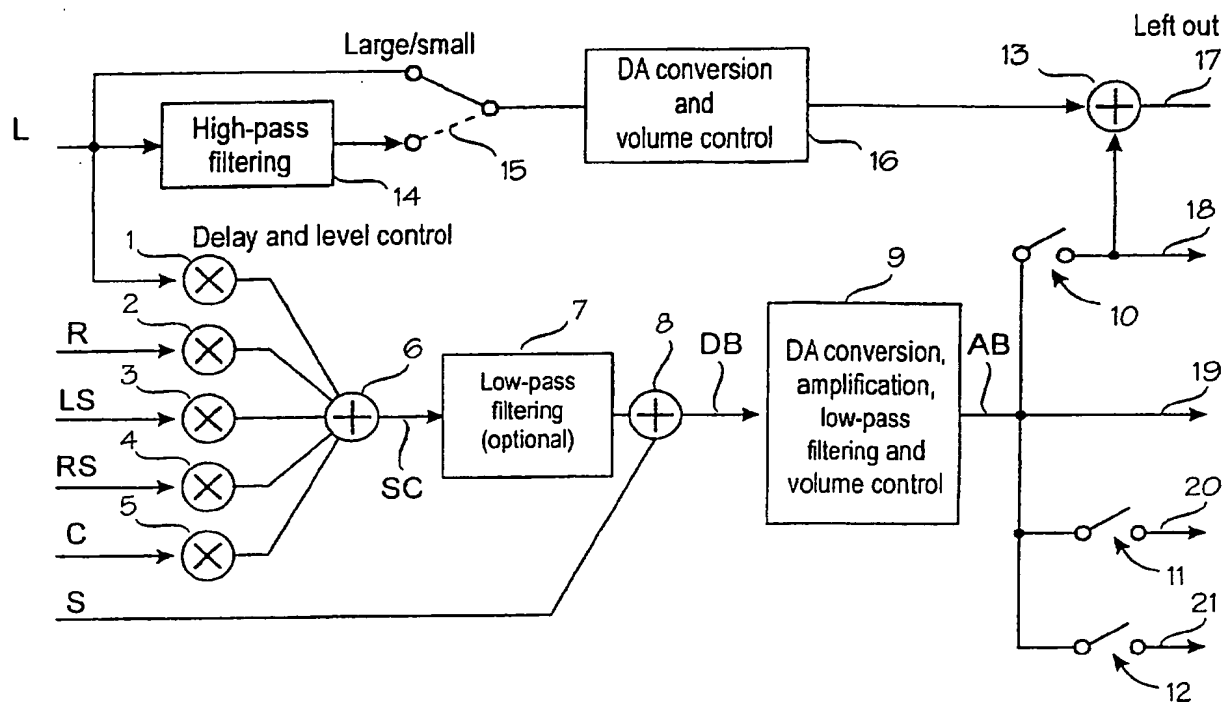

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00466

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04S 3/00 // H04R 5/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04S, H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0729287 A2 (MATSUSHITA ELECTRIC INDUSTRIAL CO. LTD), 28 August 1996 (28.08.96) ---	1-4
A	EP 0546619 A2 (N.V. PHILIPS' GLOEILAMPENFABRIEKEN), 16 June 1993 (16.06.93) -- -----	1-4

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

19 November 1997

Date of mailing of the international search report

19 -11- 1997

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Kati Öhman

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/FI 97/00466**

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0729287	A2	28/08/96	CA	2170470 A	28/08/96
				CN	1135120 A	06/11/96
				JP	8237800 A	13/09/96
				US	5668885 A	16/09/97
-----						
EP	0546619	A2	16/06/93	JP	5328481 A	10/12/93
-----						